



ZHX1810

***Slim Series SIR
Transceiver***

Product Specification

PS009319-0608



Warning: DO NOT USE IN LIFE SUPPORT

LIFE SUPPORT POLICY

ZILOG'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF ZILOG CORPORATION.

As used herein

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

Document Disclaimer

©2008 by Zilog, Inc. All rights reserved. Information in this publication concerning the devices, applications, or technology described is intended to suggest possible uses and may be superseded. ZILOG, INC. DOES NOT ASSUME LIABILITY FOR OR PROVIDE A REPRESENTATION OF ACCURACY OF THE INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED IN THIS DOCUMENT. ZILOG ALSO DOES NOT ASSUME LIABILITY FOR INTELLECTUAL PROPERTY INFRINGEMENT RELATED IN ANY MANNER TO USE OF INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED HEREIN OR OTHERWISE. The information contained within this document has been verified according to the general principles of electrical and mechanical engineering.

zilog is a registered trademark of Zilog, Inc. All other product or service names are the property of their respective owners.



**ISO 9001:2000
FS 507510**

Zilog products are designed and manufactured under an ISO registered 9001:2000 Quality Management System. For more details, please visit www.zilog.com/quality.

Revision History

Each instance in the following table reflects a change to this document from its previous revision. To see more detail, click the appropriate link in the table.

| Date | Revision Level | Section | Description | Page # |
|--------|----------------|---------|--|--------|
| 6/6/08 | 19 | | Remove Figure 8, Figure 9, Figure 13 and Figure 14 as Stars and Everlight supplied parts are obsolete. | |

Table of Contents

| | |
|--|----|
| Description | 1 |
| Features | 1 |
| Block Diagram | 1 |
| Pin Descriptions | 2 |
| LEDA LED Driver Anode | 2 |
| TXD Transmit Data | 3 |
| RXD/Receive Data | 3 |
| SD Shutdown | 3 |
| VCC Positive Supply | 3 |
| GND Ground | 3 |
| TAB | 3 |
| Recommended Application Circuits | 4 |
| Electrical and Timing Specifications | 5 |
| Mechanical Drawings | 9 |
| Soldering and Cleaning Recommendations | 10 |
| Reflow Soldering | 10 |
| Manual Soldering | 10 |
| Cleaning (Preferred) | 10 |
| Packing, Storage, and Baking Recommendations | 11 |
| Storage | 11 |
| Baking | 11 |
| Moisture-Proof Packing | 12 |
| Taping Specifications | 13 |
| Ordering Information | 14 |
| Customer Support | 16 |

Description

The ZILOG ZHX1810 is a low-profile version of Zilog's popular ZHX1010 1-meter transceiver. The transceiver is mechanically enhanced for ultra compact, power-conscious portable products, such as mobile phones, portable printers, handheld computers, and personal data assistants (PDAs). Designed to operate using the IrDA-Data mode, the transceiver combines an infrared emitting diode (IRED) emitter, a PIN photodiode detector, a digital AC coupled LED driver, and a receiver/decoder in a single package.

The ZILOG ZHX1810 provides an efficient implementation of the SIR standard in a small-outline footprint format. Application circuit space is also minimized, as only three components are required.

ZHX1810 also features an independently controlled shutdown that minimizes current draw to a maximum of 1 μ A.

Features

- Compliant to IrDA Data Specification SIR
- Wide power supply voltage range, 2.4 to 5.5 V
- Minimum link distance, 1 M
- Low-power, listening current, 90 μ A (typical) at 3.0 V
- Slim form factor (9.1 mm long x 3.8 mm wide x 2.73 mm high)
- Only two external components required
- Extended operating temperature range (-30 °C to $+85$ °C)
- Meets IEC 825-1 Class 1 Eye Safety Specifications

Block Diagram

Figure 1 is the block diagram for the Slim SIR transceiver.

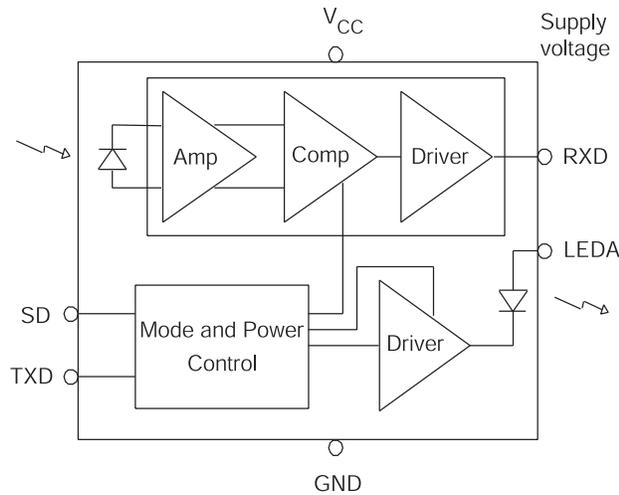


Figure 1. Slim SIR Transceiver Block Diagram

Pin Descriptions

The ZHX1810 transceiver uses the pins listed in Table 1. The pins are described in this section.

Table 1. Pin Out for the ZHX1810 Transceiver

| Pin | Name | Function | I/O |
|-----|-----------------|-----------------------|-----|
| 1 | LEDA | IRED anode | — |
| 2 | TXD | Transmitter input | I |
| 3 | RXD | Receiver output | O |
| 4 | SD | Enables shutdown mode | I |
| 5 | V _{CC} | Supply voltage | — |
| 6 | GND | Ground | — |
| — | TAB | Shield ground | — |

LEDA LED Driver Anode

(Power)

This output is connected to the LED anode. Current to the LED is sourced through an external resistor.

TXD Transmit Data

(Input, active high)

This CMOS input is used to transmit serial data. This input has an internal pull-down resistor that is disabled (open-circuited) during shutdown.

RXD/Receive Data

(Output, active low)

This output indicates received serial data. It is a tri-state, slew rate controlled CMOS output (tri-stated during shutdown) driver capable of driving a standard CMOS load. No external resistor is required.

SD Shutdown

(Input, active high)

This input is used to place the integrated circuit into shutdown mode. Module shutdown current is influenced by the choice of capacitor used from V_{CC} to ground.

V_{CC} Positive Supply

(Power)

Connect to positive power supply (2.4–5.5 V). Filter with a 0.33- μ F ceramic bypass capacitor and terminating resistor as close as possible to the V_{CC} pin.

GND Ground

(Power)

Connect to ground of the power supply. A solid ground plane is recommended for proper operation.

TAB

(Shield)

The Shield tab must be soldered to the ground plane.

Recommended Application Circuits

Figure 2 shows application block diagrams for the ZHX1810 transceiver.

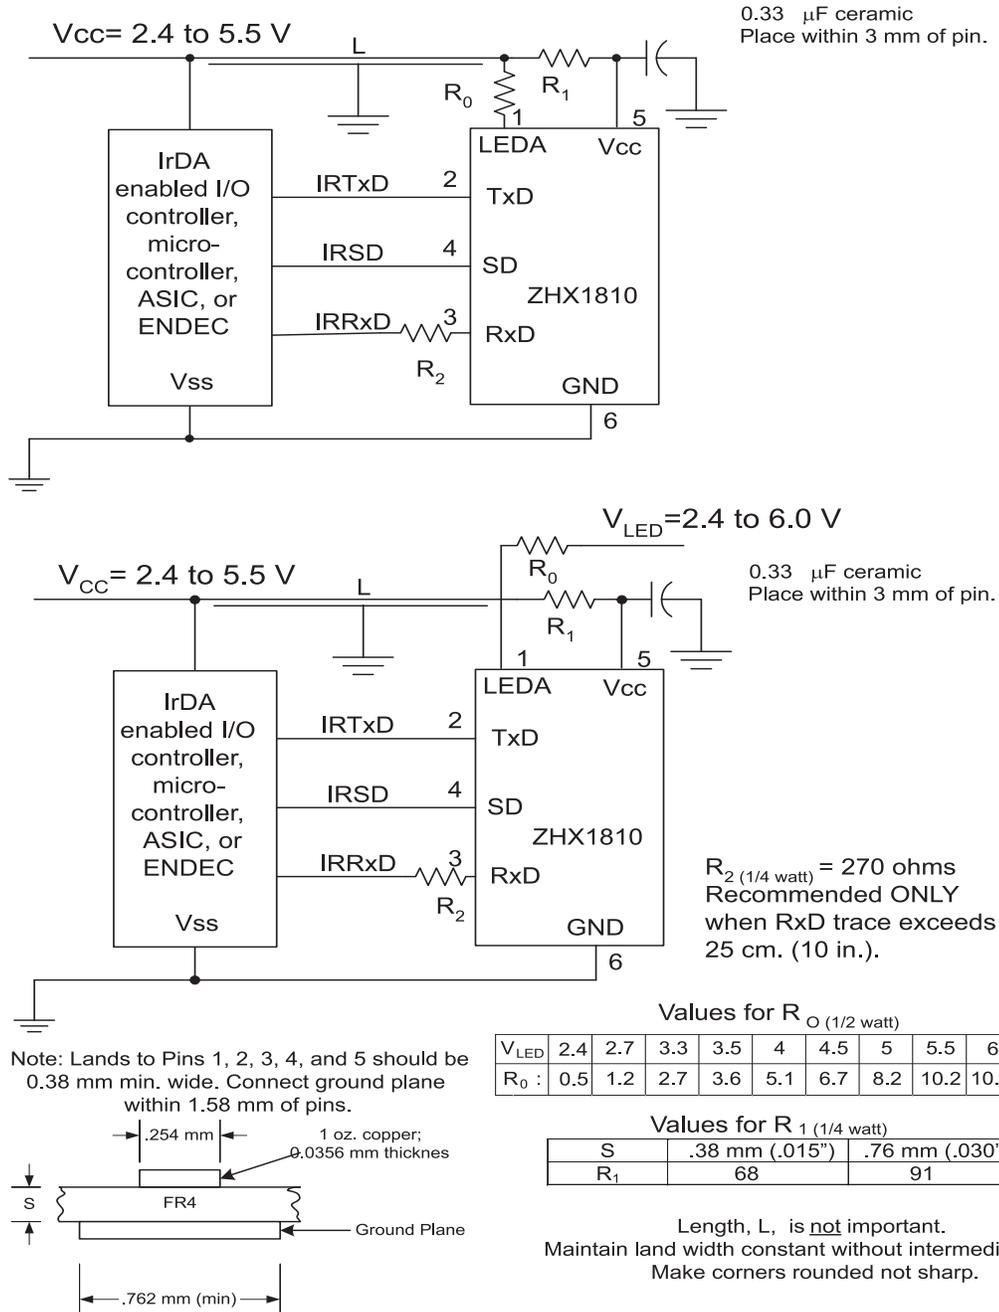


Figure 2. Application Block Diagrams

Electrical and Timing Specifications

Table 2 through Table 4 present the electrical and timing specifications for the ZHX1810 transceiver.

Table 2. Absolute Maximum Ratings

| Parameter | Symbol | Minimum | Maximum | Unit | Comment |
|---------------------------|-----------|---------|--------------|------------------|---|
| Supply Voltage | V_{CC} | -0.3 | 6.0 | V | V_{CC} , GND |
| Input Voltage | V_{IN} | GND-0.3 | $V_{CC}+0.3$ | V | TXD, SD |
| Output (External) Voltage | V_{OUT} | GND-0.3 | $V_{CC}+0.3$ | V | RxD |
| LED Current | I_{LED} | | 700 | mA | 20% duty cycle, $T_A=25\text{ }^\circ\text{C}$, $t_{ON}\leq 90\text{ }\mu\text{S}$ |
| Storage Temperature | T_{ST} | -40 | 100 | $^\circ\text{C}$ | |
| Solder Temperature | T_{SOL} | | 240 | $^\circ\text{C}$ | |
| ESD | | | 1,000 | V | |

Table 3. Recommended Operating Conditions

| Parameter | Symbol | Minimum | Maximum | Unit |
|-------------------------------|-----------|---------|---------|------------------|
| Supply Voltage | V_{CC} | 2.4 | 5.5 | V |
| LED Voltage | V_{LED} | 2.4 | 6.0 | V |
| Ambient Operating Temperature | T_{OP} | -30 | 85 | $^\circ\text{C}$ |

Table 4. Electrical Characteristics

| Parameter | Symbol | Condition | Min | Typical | Max | Unit | Remarks |
|---------------------------|-----------|-----------|--------------|---------|--------------|---------------|---------|
| High-Level Input Voltage | V_{IH} | | $0.6 V_{CC}$ | | $V_{CC}+0.5$ | V | TXD, SD |
| Low-Level Input Voltage | V_{IL} | | -0.5 | | $0.2 V_{CC}$ | V | TXD, SD |
| High-Level Output Voltage | V_{OH} | | 2.2 | | | V | RxD |
| Low-Level Output Voltage | V_{OL} | | | | 0.4 | V | RxD |
| Transmitter Current | I_{LED} | | | 300 | | mA | |
| Listening Current | I_{CC} | | | 90 | 150 | μA | |

Note: Unless otherwise noted: $V_{CC}=3.3\text{ V}$, GND= 0 V, $T_A=25\text{ }^\circ\text{C}$

Table 4. Electrical Characteristics (Continued)

| Parameter | Symbol | Condition | Min | Typical | Max | Unit | Remarks |
|---|---------------------|-------------------------|-----|---------|-----|--------------|--|
| Receive Current | I_{CC} | | | 90 | 150 | μA | |
| Standby Current | I_{STB} | | | | 1 | μA | SD= V_{CC} , TxD=0 V |
| Optical Rise/Fall Time | t_{Rr} , t_{Rf} | | | 100 | | nS | |
| RxD Pulse Width | t_{PWA} | SIR=115.2 Kbps | 1.1 | 1.6 | 3.9 | μS | |
| Power Shutdown Time | T_{SD} | | | | 1 | μS | |
| Startup Time | T_{STU} | | | | 200 | μS | |
| Receiver Latency | T_L | | | 100 | | μs | |
| Trans. Radiant Intensity | I_E | $I_{LED}=260\text{ mA}$ | 40 | | 100 | mW/sr | θ_h , $\theta_v \leq (\pm 15^\circ)$ |
| Min. Threshold Irradiance | E_{emin} | $V_{CC}=3.3\text{ V}$ | | 2 | 3 | $\mu W/cm^2$ | θ_h , $\theta_v \leq (\pm 15^\circ)$ |
| Angle of Half Intensity | θ | | | 20 | | $^\circ$ | Hor. and Vert. |
| Light Pulse Rise, Fall Time | t_{or} , t_{of} | | | 40 | | nS | |
| Optical Pulse Width | t_{OPW} | | | 20 | | μS | TxD="H" |
| Optical Overshoot | t_{OPO} | | | | 3 | % | |
| Peak Wavelength | λ_P | | | 870 | | nm | |
| Note: Unless otherwise noted: $V_{CC}=3.3\text{ V}$, GND= 0 V, $T_A= 25\text{ }^\circ\text{C}$ | | | | | | | |

Figure 3 through Figure 6 show various electrical characteristics.

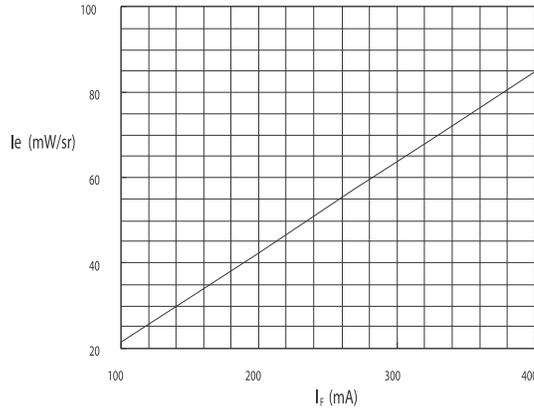


Figure 3. I_F-I_e Characteristics (0°)

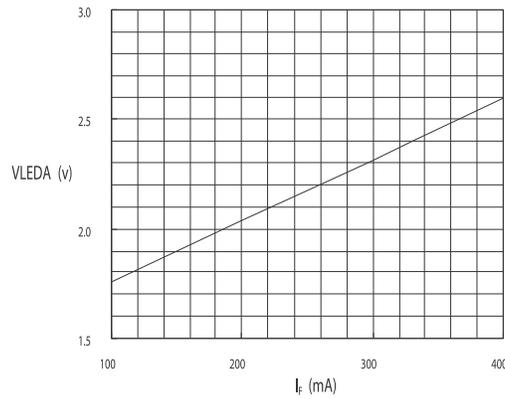


Figure 4. I_F-VLEDA Characteristics (0°)

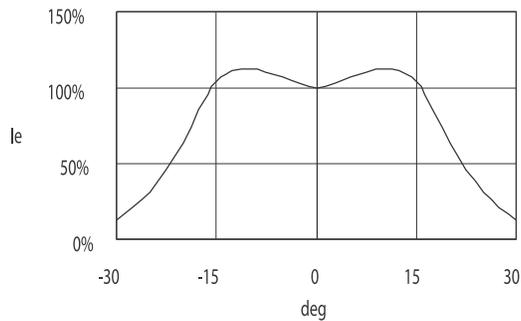


Figure 5. Directive Characteristics (Emitting)

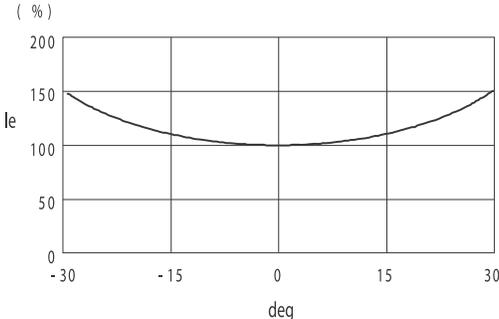


Figure 6. Directive Characteristics (Receiving)

Soldering and Cleaning Recommendations

Follow these recommendations to maintain the performance of the ZHX1810 transceiver.

Reflow Soldering

- ▶ **Note:** Please refer to Zilog's Lead-Free Solder Reflow: Packaging Application Note (AN0161, <http://www.zilog.com/docstools.asp>) for more information about the solder profile.

Manual Soldering

- Use 63/37 or silver solder.
- Use a soldering iron of 25 W or smaller. Adjust the temperature of the soldering iron below 300 °C.
- Finish soldering within 3 seconds.
- Handle only after ZHX1810 has cooled off.

Cleaning (Preferred)

Perform cleaning after soldering under the following conditions:

- Cleaning agent: Alcohol
- Temperature and time: 30 seconds below 50 °C or 3 minutes below 30 °C
- Ultrasonic cleaning: Below 20 W

Additional cleaning methods can also be used. Please see the www.zilog.com documentation pages for details.

Packing, Storage, and Baking Recommendations

Follow these recommendations to maintain the performance of the ZHX1810 transceiver.

Storage

To avoid moisture absorption, ZHX1810 reels must remain in the original, unopened moisture-proof packing. Parts must be soldered within 72 hours after unpacking. Reels that have been unpacked, but will not be soldered within 72 hours, must be stored in a desiccator.

Baking

Parts that have been stored over 12 months or unpacked over 72 hours must be baked under the following guidelines.

Reels

60 °C for 48 hours or more

Loose Parts

- 100 °C for 4 hours or more
or
- 125 °C for 2 hours or more
or
- 150 °C for 1 hour or more

Moisture-Proof Packing

In order to avoid moisture absorption during transportation and storage, ZHX1810 reels are packed in aluminum envelopes (see Figure 8) that contain a desiccant with a humidity indicator. While this packaging is an impediment to moisture absorption, it is by no means absolute, and no warranty is implied. The user should store these parts in a controlled environment to prevent moisture entry. Please read the label on the aluminum bag for indicator instructions.

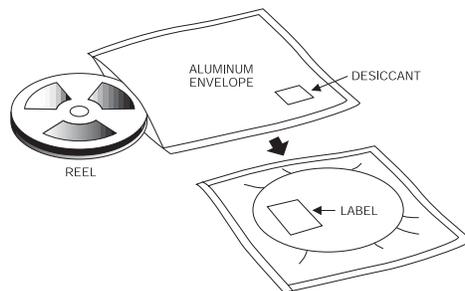


Figure 8. ZHX1810 Packaging

Taping Specifications

Figure 9 shows the reel dimensions for the ZHX1810. Figure 10 shows the tape dimensions and configuration for the ZHX1810.



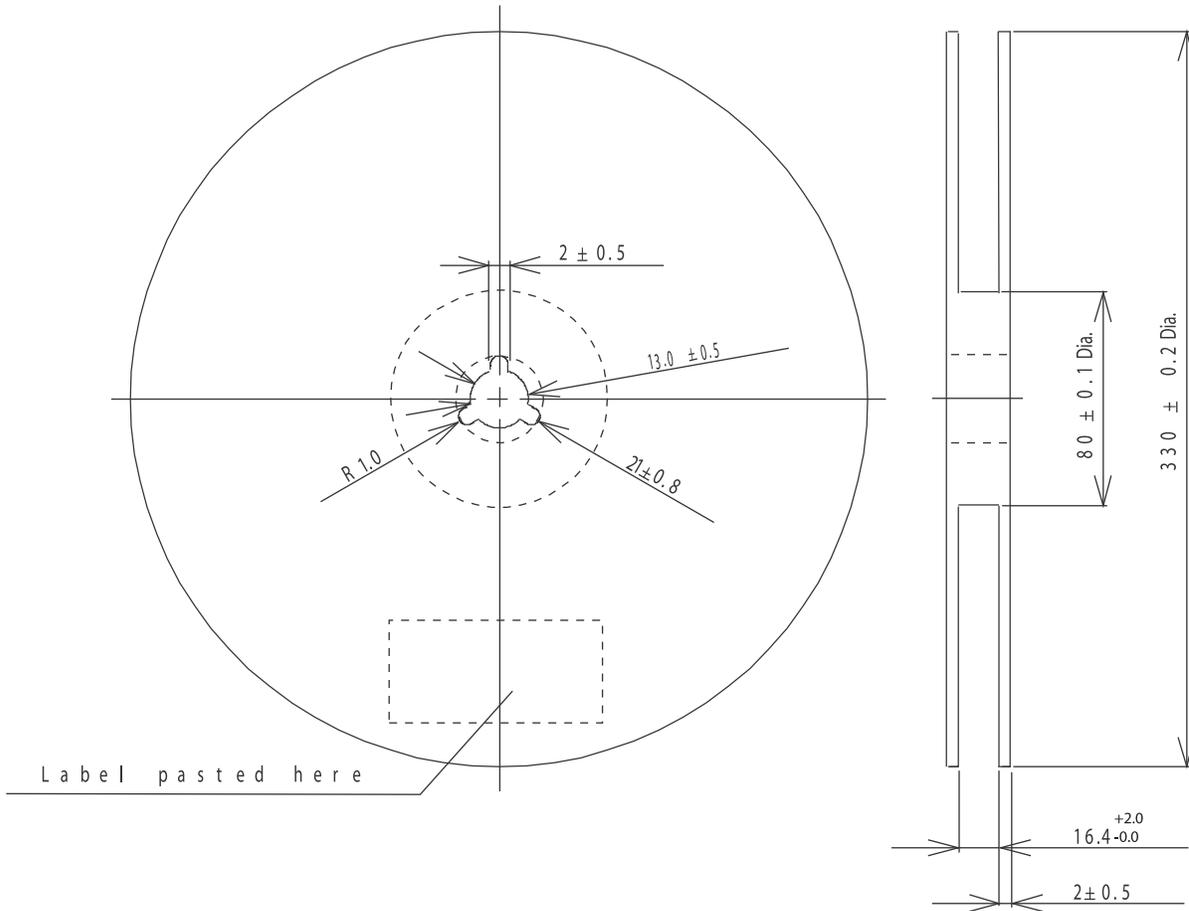


Figure 9. ZHX1810 Reel Dimensions (Unit: mm)

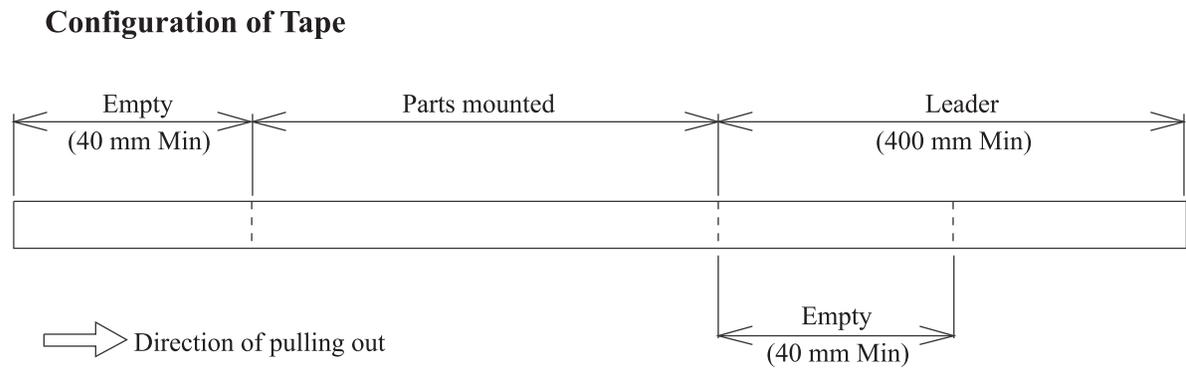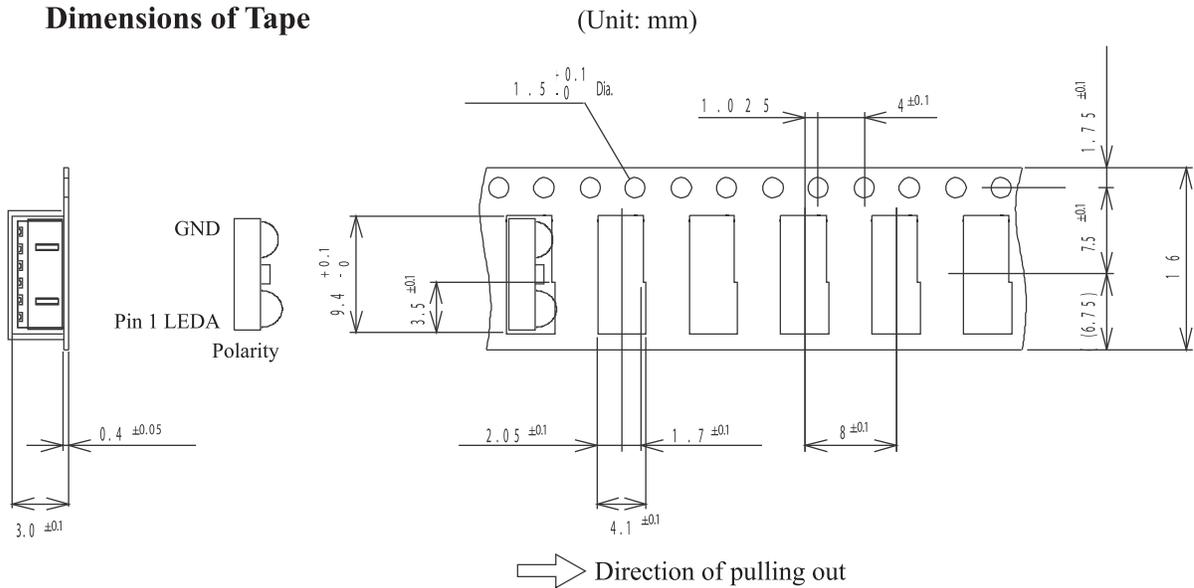

Quantity: 2,000 pcs/reel

Figure 10. ZHX1810 Tape Dimensions and Configuration (Unit: mm) for Figure 7

Ordering Information

To order ZHX1810, use Zilog part number ZHX1810MV115THTR.

- **Notes:** In order to ensure the lowest possible lead times, Zilog uses two different fab sources for the transceiver IC. Both of these ICs have been extensively tested and qualified to meet the ZHX1810 transceiver specifications.



All Zilog devices are available lead free. Since 2005, ZHX1810 has been manufactured with lead-free components. When ordering from your Zilog distributor, there is a possibility that the parts containing lead might be shipped. To ensure that you receive lead-free devices, please use part number ZHX1810MV115TH2090TR. These devices meet or exceed RoHS Directive 2002/95/EC. For additional information, please see the Zilog Quality and Reliability web page at <http://www.zilog.com/quality/index.asp>.

Customer Support

For answers to technical questions about the product, documentation, or any other issues with Zilog's offerings, please visit Zilog's Knowledge Base at <http://www.zilog.com/kb>.

For any comments, detail technical questions, or reporting problems, please visit Zilog's Technical Support at <http://support.zilog.com>.