


Fast-Acting Fuses

13/32" x 1-1/2"
600 Volt AC and DC, 1/10-30A

Dimensional Data

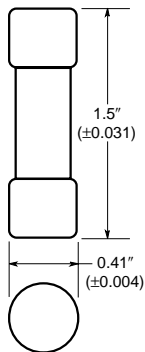

Designed To:

Fuses:	Designed to:
DCM 1/10 thru 30	Carry 110% of rating for 4 hours AC Opens at 135% of rating within 1 hour AC Maximum Interrupting Rating of 100kA at 600Vac DC Maximum Interrupting Rating of 50kA at 600Vdc DC Minimum Interrupting Rating of 200% rated current at 600Vdc,

Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight	
		Lbs.	Kg.
0-30	10	.187	.088

Catalog Symbol: DCM
Fast-Acting 1/10 TO 30A
UL Listed: STD. 248-14, (FILE #E19180, GUIDE #JDYX)
CSA Certified, C22.2 NO. 248. 14 (CLASS #1422-01, FILE #53787)
Interrupting Ratings: 100k at 600Vac
 50k at 600Vdc

Electrical Ratings (Catalog Symbol and Amperes) IR 100,000 ac

DCM-1/10	DCM-1/2	DCM-2	DCM-6	DCM-12
DCM-1/8	DCM-3/4	DCM-2-1/2	DCM-7	DCM-15
DCM-2/10	DCM-1	DCM-3	DCM-8	DCM-20
DCM-1/4	DCM-1-1/4	DCM-4	DCM-9	DCM-25
DCM-3/10	DCM-1-1/2	DCM-5	DCM-10	DCM-30

- A Full range DC midget fuse.
- Melamine tube.
- Nickel-plated brass endcaps.


Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses
 See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151, 2143
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Global Modular Fuse Holders

Designed to Accommodate Multitude of Fuse Standards

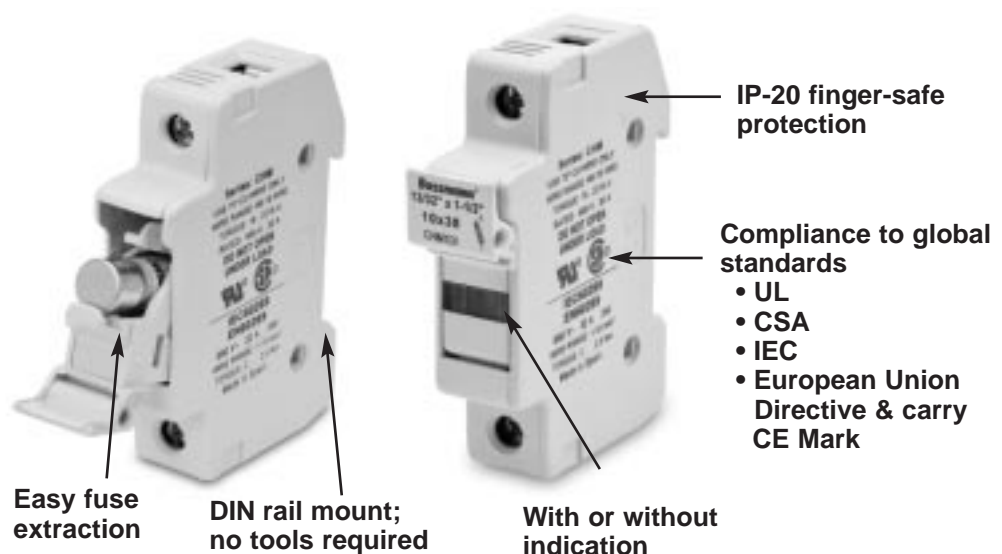


Series Size CHCC Class CC	Compliance UL / CSA	Max Voltage & Current 600Vac/dc, 30A
------------------------------	------------------------	---

Fast-Acting Fuses

13/32" x 1-1/2"
600 Volt AC and DC, 1/10-30A

DCM

Time-Current Characteristic Curves—Total Clearing

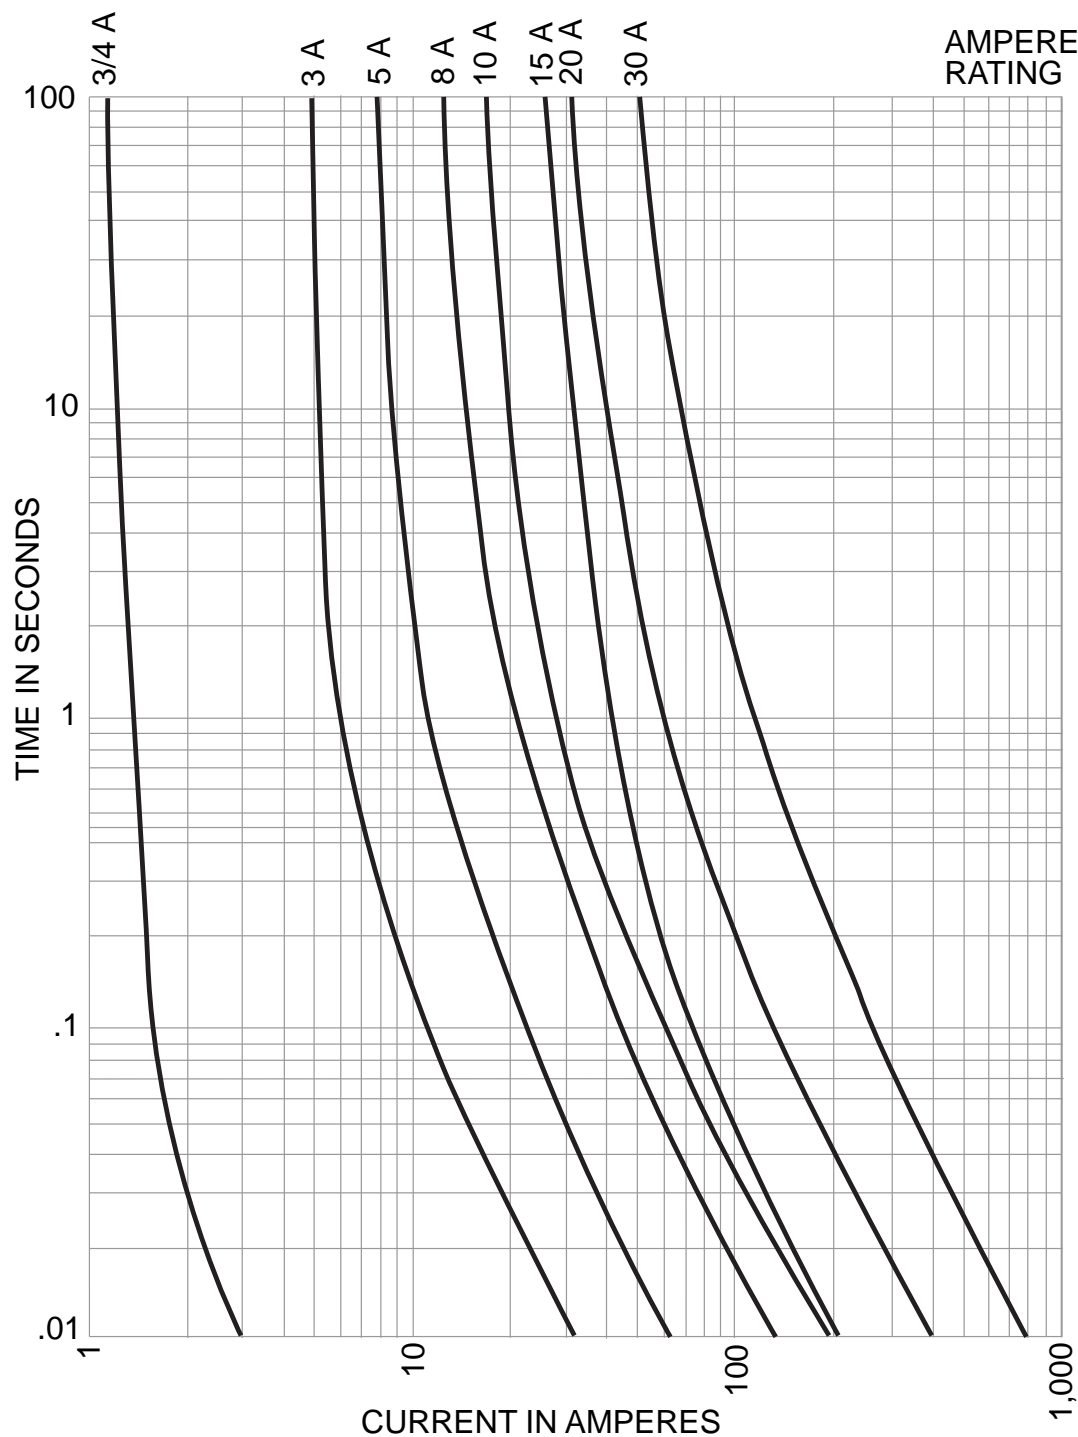

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this Data Sheet are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.