


HONEYWELL
PART NUMBER

REV	DOCUMENT	CHANGED BY	CHECK
6	0041135	VS 26JUN08	BLR

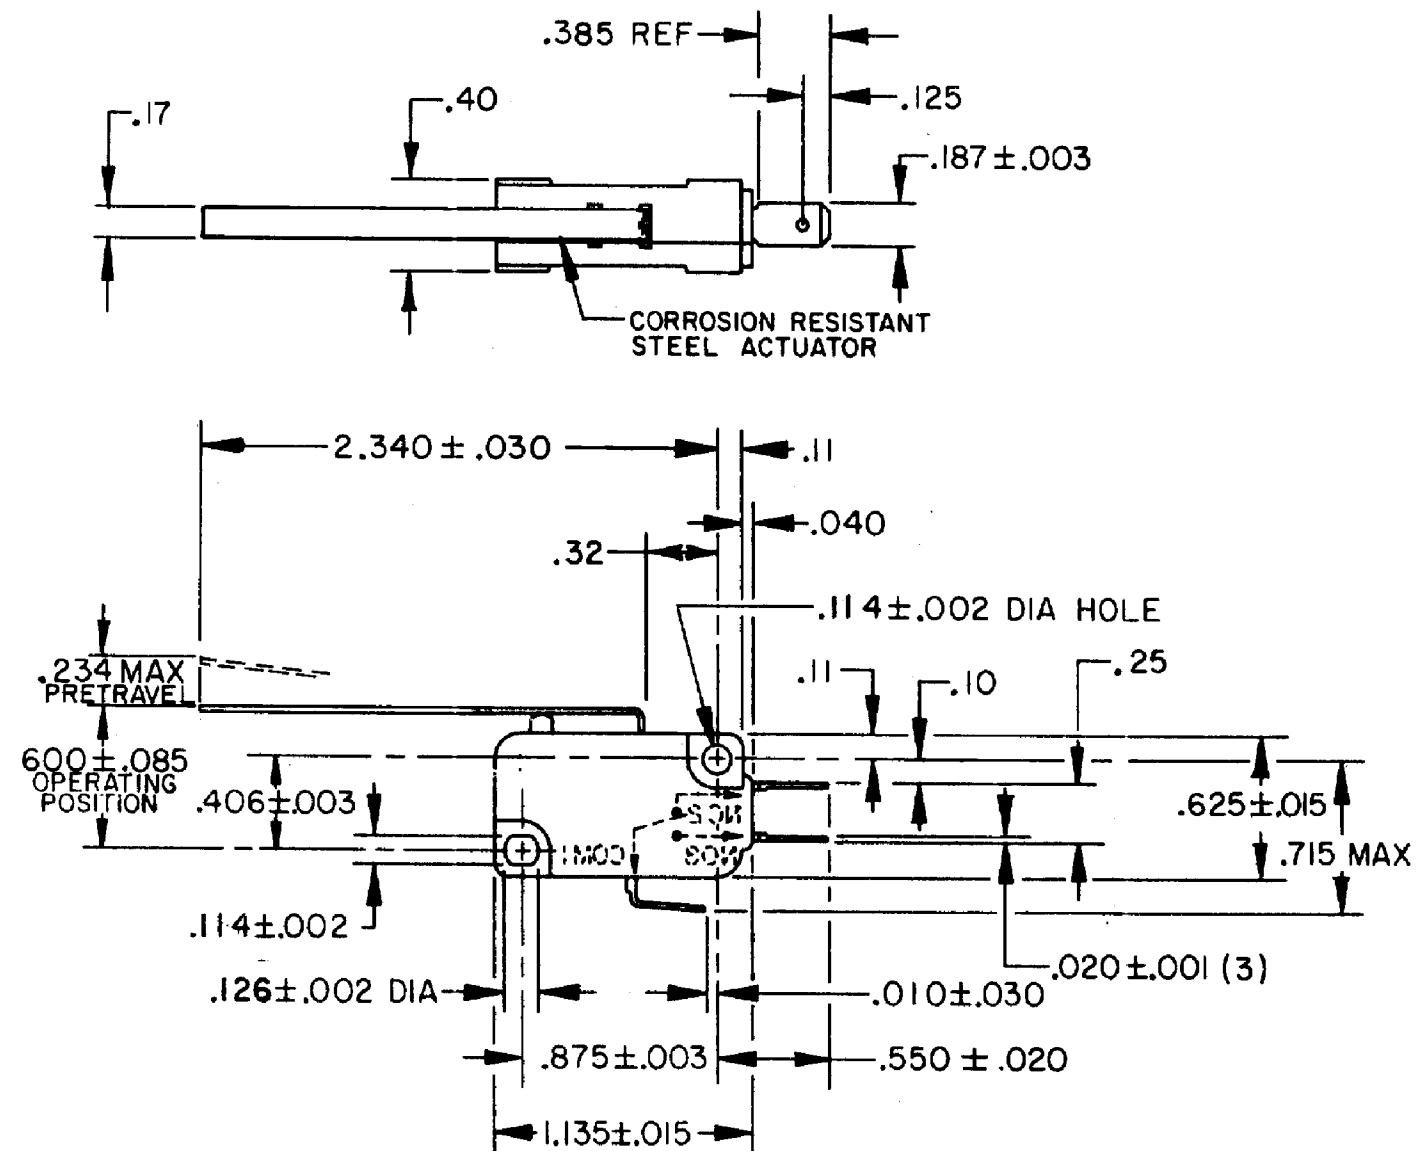

RELEASE NO	CATALOG LISTING
PR-16322	V7-1C17D8-048
	CW-B1620

CHARACTERISTICS	
OPERATING FORCE-----	45 GRAMS MAX
RELEASE FORCE -----	5 GRAMS MIN
DIFFERENTIAL TRAVEL -----	.060 MAX
OVERTRAVEL -----	.165 MIN
RELEASE TRAVEL -----	.030 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
L215	
15.1A 1/2HP 125, 250, 277 VAC	
1/2A 125 VDC	
1/4A 250 VDC; 5A 125 VAC "L"	

DESIGN UNITS: INCH	
TOLERANCES UNLESS NOTED:	
NO PLACE	X ±
ONE PLACE	.X ±
TWO PLACE	.XX ±
THREE PLACE	.XXX ±
FOUR PLACE	.XXXX ±
ANGLES	±
THIRD ANGLE PROJECTION	

DRAWN	JAP	28MAR88
CHECK	DCS	28SEP89
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

Honeywell			
TITLE SWITCH, BASIC			
SIZE	DWG TYPE	DRAWING NAME	REV
B	I	V7-1C17D8-048	6
SCALE	WEIGHT	SHEET	OF
-		1	1

