

MICRO SWITCH

FREEMONT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-2B17D8

CW-B3068

V7-2B17D8

M

DRAWING NUMBER

X

X

ISSUE

4

REPLACES X94129-V7

RELEASE NO. PR-16116

CHECK

REVISIONS

A	C066350	J A P	14 SEPT 89
B	CO 69746	WJC	15 MAR 91
C	CO 76108	L J F	25 OCT 93

CHECK

11 JAN 88

MAM


88

JAN

FO-52848-A


DRAWN

KAG

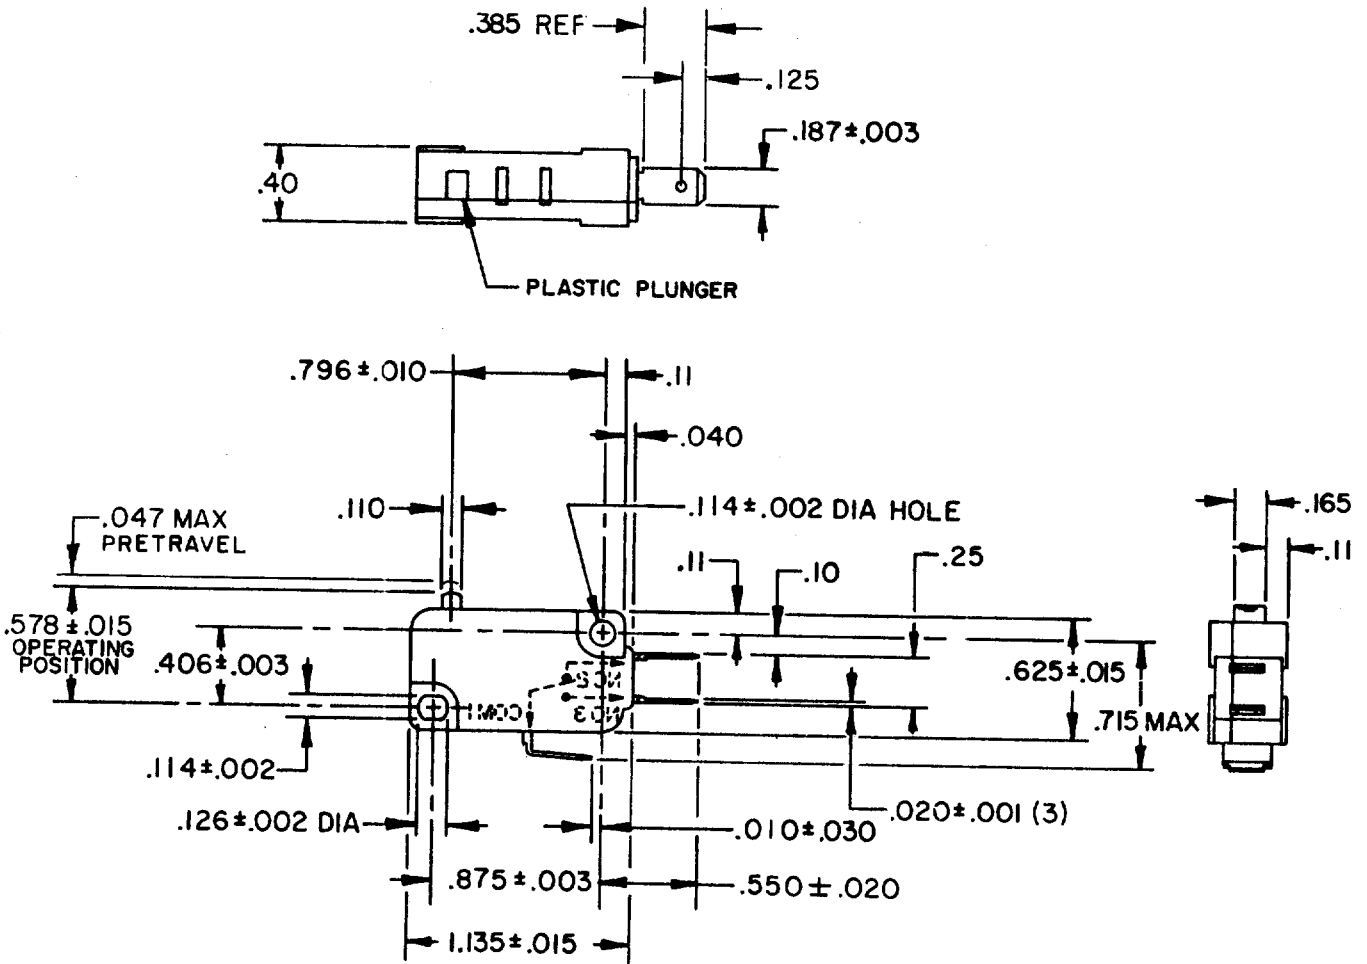

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 75 GRAM MAX
RELEASE FORCE ----- 10 GRAM MIN
RELEASE TRAVEL ----- .010 MIN
DIFFERENTIAL TRAVEL ----- .002-.010
OVERTRAVEL ----- .050 MIN
FREE POSITION ----- .625 MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L 156
11A 1/3 HP 125, 250, 277 VAC
1/2A 125 VDC, 1/4A 250 VDC
4A 125 VAC "L"



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM.	TOL.	DIM.	TOL.
	mm	mm/in	in	mm/in
NO PLACES	X	17.04	X X	0.87/03
ONE PLACE	X X	0.47/018	X X X	0.087/015
TWO PLACES	X X X	0.107/006	X X X X	0.13/005
THREE PLACES				
ANGLES				

DESIGN UNITS

SI METRIC

US CUSTOMARY

WEIGHT