


GROMMETS & BUSHINGS


MCCG/MCCGF Metal Continuous Cushioned Grommet

NEW

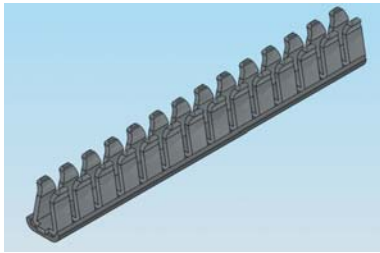

Features

- Polymer cushion provides a soft surface to protect wires and cable
- Heat continuous to 185°F (85°C)
- Low temperature to -40°F (-40°C)
- High corrosion resistance
- UL94 V-0 flammability rating
- Superior dielectric strength: 1200 volts@ 60Hz per MIL-STD-202; method 301
- High shock and vibration resistance to rms G 41.7
- Flexible style provides continuous edge protection on flanged holes, 1/8 (3.18) or greater inside radius and 1/4 (6.35) or greater outside radius

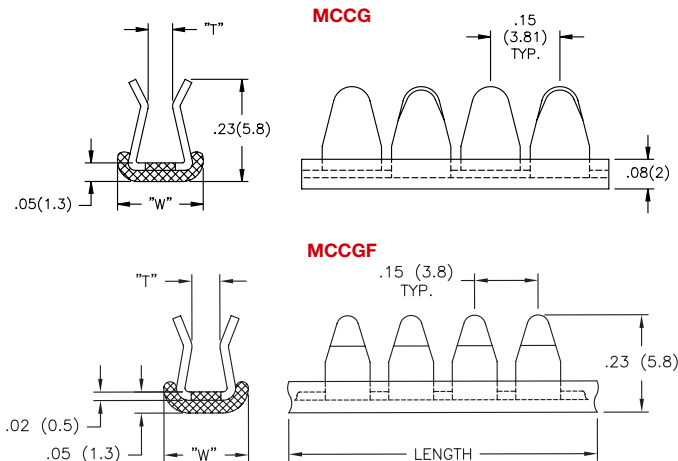


MCCG	Fusion Bonded Nylon 11 (RMS-192) Coating, 46 Durometer Shore D Cushion; Color : Black	Standard Pack: 100 Ft. (30.48M) Reel
Mat'l: 300 Stainless Steel	"T" Application Thickness	"W"
MCCG-1N	.025 - .036 (1.64 - 0.91)	.19 (4.8)
MCCG-2N	.037 - .055 (0.93 - 1.40)	
MCCG-3N	.056 - .074 (1.42 - 1.90)	
MCCG-4N	.075 - .093 (1.91 - 2.36)	
MCCG-6N	.113 - .134 (2.87 - 3.40)	.22 (5.6)
Mat'l: Extra Flexible 300 Stainless Steel	"T" Application Thickness	"W"
MCCGF-1N	.025 - .045 (0.6 - 1.1)	.19 (4.8)
MCCGF-2N	.044 - .056 (1.1 - 1.4)	
MCCGF-3N	.055 - .069 (1.4 - 1.7)	

Hand held cutting tool needed, order part number MCGS-1


MCG/MCGF Metal Continuous Grommet

NEW

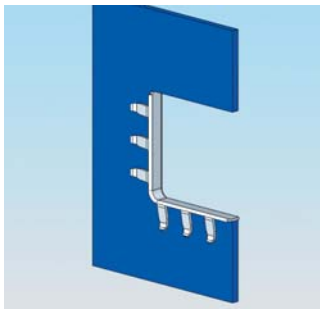

Features

- Heat continuous to 285°F (140°C)
- Low temperature to -40°F (-40°C)
- High corrosion resistance
- *Dielectric:* 1000 volts@ 60Hz per MIL-STD-202; method 301
- *Abrasion:* ASTM D1044 CS17 wheel 1000g weight 0.008g loss 5000 cycles
- UL94 V-0 flammability rating
- High shock and vibration resistance to rms G 41.7
- Flexible style provides continuous edge protection on flanged holes, 1/8 (3.18) or greater inside radius and 1/4 (6.35) or greater outside radius

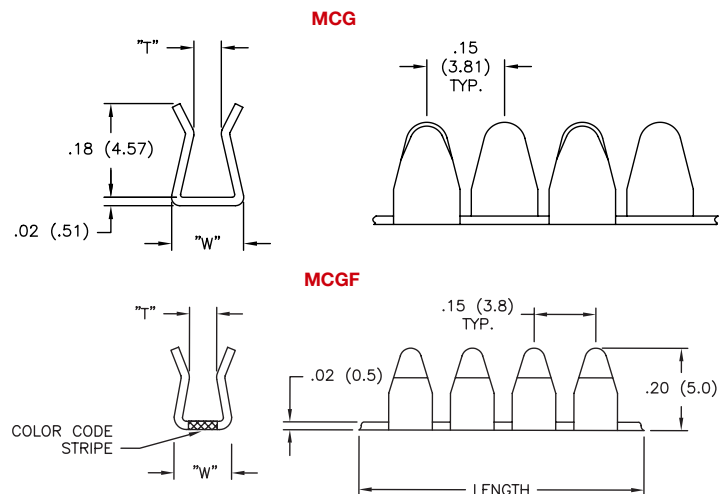

MCG	Fusion Bonded Nylon 11 (RMS-192) Coating, Color : Black	Standard Pack: 100 Ft. (30.48M) Reel	
Mat'l: 300 Stainless Steel	"T" Application Thickness	"W"	
MCG-1N	.025 - .036 (1.64 - 0.91)	.19 (4.8)	
MCG-2N	.037 - .055 (0.93 - 1.40)		
MCG-3N	.056 - .074 (1.42 - 1.90)		
MCG-4N	.075 - .093 (1.91 - 2.36)		
MCG-6N	.113 - .134 (2.87 - 3.40)	.22 (5.6)	
Mat'l: Extra Flexible 300 Stainless Steel	"T" Application Thickness	"W"	Color Code Stripe
MCGF-1N	.025 - .045 (0.6 - 1.1)	.19 (4.8)	White
MCGF-2N	.044 - .056 (1.1 - 1.4)		Pink
MCGF-3N	.055 - .069 (1.4 - 1.7)		Yellow

Hand held cutting tool needed, order part number MCGS-1