
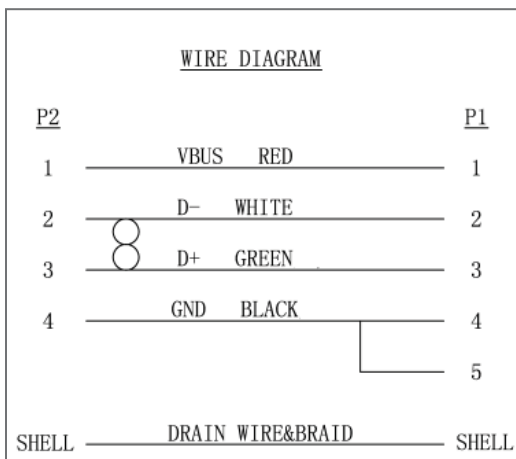


### Specifications:

plug (1) description	USB socket, A type, 4 position, 3~5u" gold plating, white insulator, nickel shell, overmold
plug (2) description	mini-USB socket, A type, 5 position, 3~5u" gold plating, white insulator, nickel shell
cable description	USB V2.0 cable, UL approved white (HT001) PVC jacket, 4 conductors: 1&2: 28AWG (7/36) tinned copper stranded wire, SR-PVS insulation 3: 28 AWG (7/36) tinned copper stranded wire, PE insulation 4: aluminum foil, tinned copper braided shield & 28 AWG drain wire
cable outer diameter	3.6
cable color	white
cable gauge	28 AWG
overmold (4) description	molded white (HT027) PVC, 45 P
overmold (5) description	clear PE

### Mechanical drawing:

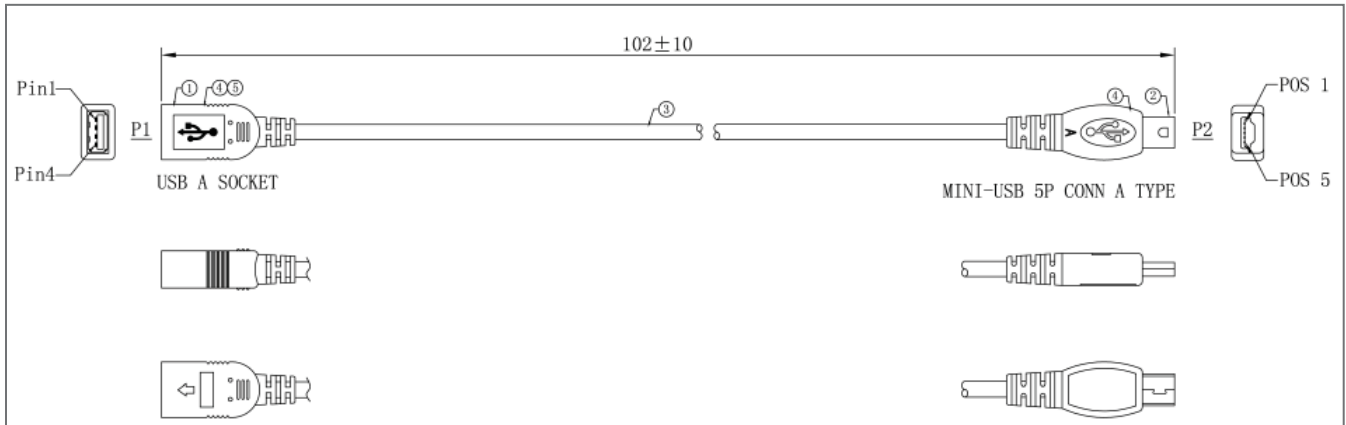

### Notes:

Function test: no open, no reversed polarity, no short circuit, or no INT  
 Hi-POT test: 600 Vac, 0.5 mA, 1 sec.  
 RoHS compliant

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm