
FCI P/N TYPE HOUSING SEE NOTE 3 COLOR 10006770-050LF MM-50 BLACK 10006770-062LF MM-62.5 BEIGE 10006770-008LF SM (SEE NOTE 2) BLUE

PERFORMANCE SPECIFICATIONS FCI DASH NO. -050 -062 -008 WAVE LENGTH: 1300 ASSEMBLY LOSS @1300 (dB): 0.0 1.0 MIN 1.0 3.0 MAX 3.0 1.5 RETURN LOSS: N/A OPERATING TEMP (*C) (-20) - (+70) (-20) - (+70) (-20) - (+70)THERMAL STABILITY: < 0.2 < 0.2 < 0.2

3



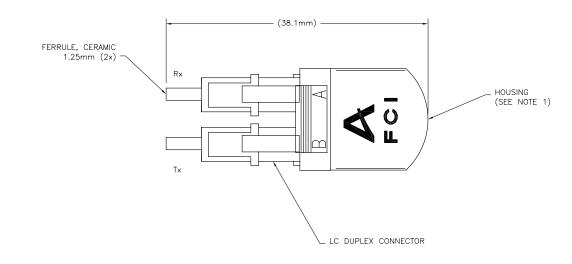

- (1) HOUSING IS NOT A HANDLE.
- (2) FOR SM ONLY: USE 50um GLASS FOR THE LC LOOPBACK. THE TESTING METHOD WILL BE THE SAME AS IF THE GLASS TYPE WAS 10um. THE MASTER CABLES USED IN TEST ARE 10um SM CABLES. THE FERRULES USED ARE SM FERRULES.
- (3) LF INDICATES THE PRODUCT IS LEAD FREE. (EX. 10006770-050LF IS LEAD FREE)
- 4. THIS PRODUCT IS NOT ENTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.
- 5. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

1 2

	mat'l. code						tolerances unless otherwise specified						CUSTOMER					A							
	ltr	ecn no		dr	date				NOMINALS ONLY					COPY			FCI www.fciconnect					nnect.c	om		
D	Α	V20908		JJK	5/20	0/02	linea	r 🔃	UNLESS N			NOTED		projection		title									
וט	В	3 V21041		JJK	6/1	1/02											LOOPBACK, LC								
	С	V21084		BKB	7/13	7/02	angle	es					$\Psi $			DUPLEX									
	D	V05-0732		DAI	10/0	4/05	dr		J. KILE			5/10/02					product family FIBER OPTICS code							е	
							engr	G.	G. WARNER		5/10/02		-		size	size dwg no						_			
							chr	G.	G. WARNER		5/10/02				Α4	10006			67	70	7	she	et	t	
							appd	G.	G. WARNER		5/10/02					- 1	\cup	100//0			J	1 of 1			
	shee	sheet r		evision																					
inde		ex shee		t	1																				L
			A	D				_				3		_			'	cage		526	3			4	

ACAD

PDM: Rev:D

STATUS: Released Printed: Apr 17, 2008

LIGHT PATH

RX Α -

TX В