

# Humidity Sensor



## APPLICATIONS

- Humidity measurements in electronic hygrometers for domestic use
- Self-regulating air humidifiers, etc.

## DESCRIPTION

This capacitive atmospheric humidity sensor consists of a non-conductive foil, which is covered on both sides with a layer of gold. The dielectric constant of the foil changes as a function of the relative humidity of the ambient atmosphere and, accordingly, the capacitance value of the sensor is a measure for relative humidity. The foil is clamped between contact springs and assembled in a plastic housing. It is provided with two connecting pins which fit printed-circuit boards with a grid pitch of 2.54 mm, provision is also made for fastening with 3 mm bolts. The characteristics are not affected by incidental water condensation on the sensor foil. It should not be exposed to either acetone or chlorine vapours.

## MOUNTING

The device can be soldered directly on to a printed-circuit board or fastened with 3 mm bolts.

## SOLDERING

Solderability:  $\leq 240\text{ }^\circ\text{C}; \leq 4\text{ s}$   
 Resistance to heat:  $\leq 240\text{ }^\circ\text{C}; \leq 4\text{ s}$

## ROBUSTNESS OF TERMINATIONS

Tensile strength: 10 N

## ELECTRICAL CHARACTERISTICS

QUICK REFERENCE DATA		
PARAMETER	VALUE	UNIT
Humidity range (RH)	10 to 90	%
Capacitance at + 25 °C; 43 % RH; 100 kHz	$122 \pm 15\%$	pF
Tan $\delta$ at + 25 °C; 100 kHz; 43 % RH	$\leq 0.035$	
Sensitivity between 12 and 75 % RH	$0.4 \pm 0.05$	pF/%RH
Frequency	1 to 1000	kHz
Temperature dependence	0.1	%RH/K
Response time in minutes (to 90 % of indicated RH change at + 25 °C, in circulating air): between 10 and 43 % RH between 43 and 90 % RH	< 3 < 5	
Hysteresis (for RH excursion of 10 to 90 to 10 %)	$\approx 3$	%
Maximum AC or DC voltage	15	V
Storage humidity range (RH)	0 to 100	%
Ambient temperature range: operating storage	0 to + 85 - 25 to + 85	$^\circ\text{C}$ $^\circ\text{C}$
Drop test: height of free fall	1	M
Mass	$\approx 1.3$	G

### Note:



Unless otherwise stated, measurements are in accordance with "IEC publication 60539"

Component is 100 % lead (Pb)-free

Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

Stability is in accordance with "CECC 43000" and "IEC 60068-2"

## DIMENSIONS in millimeters

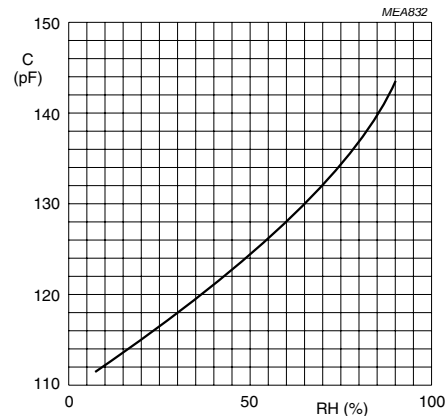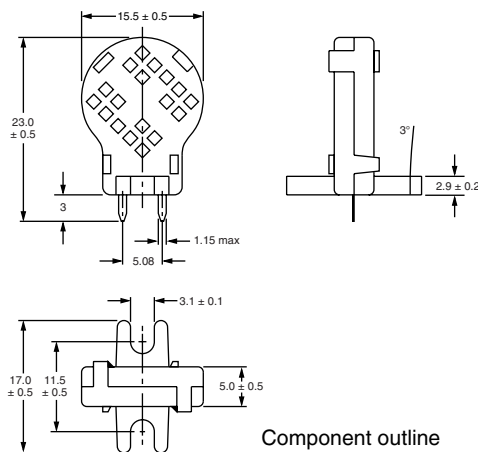

Typical capacitance as a function of relative humidity



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.