


Stripp Block for Snap Mounting with 4 IEC Appliance Outlets C14 and space for extra component



Snap-In Version



Description

- Panel Mount:
Snap-in version from front side
- 3 Functions:
Module of 4 outlets, with additional carrier frame for accessory modules, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

Approvals

- CSA License Number: 56242

Characteristics

- Insulation cover on the rear-side
- Qualified for use in equipment according IEC/EN 60950

Other versions on request

- For protection class II

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data


Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Snap-in 1/ 1.2/ 1.5/ 2/ 2.5/ 3 mm tolerance +0.0/-0.1
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
-------------------------	--

Dimensions

Quadbloc + One 4754

Cut-out for 2 mm Snap-in Inlet

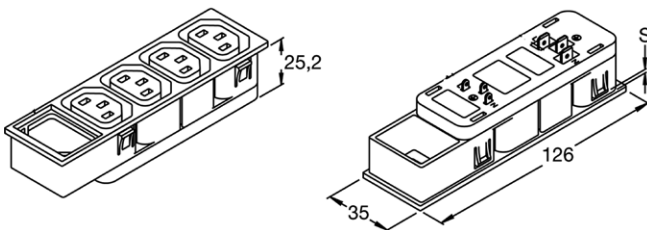

Panel cut-out 122.1 x 32.5 mm, corner radius max. 1 mm
With appliance inlet, type 6100

Variants

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Panel Thickness s [mm]	Terminal	Length [mm]	Order Number
1	Quick connect terminals 6.3 x 0.8 mm	126	4754.3200
1.2	Quick connect terminals 6.3 x 0.8 mm	126	4754.8200
1.5	Quick connect terminals 6.3 x 0.8 mm	126	4754.4200
2	Quick connect terminals 6.3 x 0.8 mm	126	4754.5200
2.5	Quick connect terminals 6.3 x 0.8 mm	126	4754.6200
3	Quick connect terminals 6.3 x 0.8 mm	126	4754.7200
1	Solder terminals 4 x 0.8 mm	126	4754.3400
1.2	Solder terminals 4 x 0.8 mm	126	4754.8400
1.5	Solder terminals 4 x 0.8 mm	126	4754.4400
2	Solder terminals 4 x 0.8 mm	126	4754.5400
2.5	Solder terminals 4 x 0.8 mm	126	4754.6400
3	Solder terminals 4 x 0.8 mm	126	4754.7400
1	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.3000
1.2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.8000
1.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.4000
2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.5000
2.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.6000
3	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.7000

Please note, all quadblocs are available in protection-class II upon request.

Cord retaining clamp see accessories

Packaging unit

40 Pcs

Accessory

Description



Cord retaining kits

Cord retaining strain relieve

Flat head, Z	0888.0021
Flat head, E	4700.0005
Flat head, G	4700.0007
Flat head, H	4700.0008

Mating Inlets/Plugs

Category / Description

Interconnection Cord



Power Cord with IEC Appliance Plug E, angled, 70°C	0607
Power Cord with IEC Appliance Plug E, angled, 70°C	0608
Power Cord with IEC Appliance Plug E, straight, 70°C	0609
Power Cord with IEC Appliance Plug G, angled, 70°C	607B
Power Cord with IEC Appliance Plug G, angled, 70°C	608B
Power Cord with IEC Appliance Plug G, straight, 70°C	609B

Plug Connector



IEC plug connector E, rewirable, straight, max. cable diameter 8.5 mm	4732
IEC plug connector E, rewirable, angled, max. cable diameter 10 mm	4733
IEC plug connector E, rewirable, straight, max. cable diameter 10 mm	4735
IEC plug connector E, rewirable, angled, max. cable diameter 10 mm	4736
IEC plug connector E, rewirable, straight	9009
IEC plug connector E, rewirable, angled	9013
IEC plug connector E, rewirable, angled	P685