CONFIDENTIAL

.448 [||.38]

mat'l code SEE NOTE 2							tolerances unless otherwise specified					STOM	IER		D	K					
ltr	ecn no. dr V21353 TAB DG05-0304 GuoJ		dr	do	ite		.XX±.01/0.X±0.3				COPY projection				FC	<b>&gt;</b>		ww	w.fcico	onnect.	com
Α			TAB	08/21	1/02	linear	.XXX±.005/0.XX±0.13			title 5P + 8S + 2P											
В			GuoJM	09/14/05			.XXXX±.0020/0.XXXX±0.05			+			ם	/ A	-					ACLE	
				angles $0^{\circ} \pm 2^{\circ}$								R/A SOLDER RECEPTACLE									
					dr		T. BRUNGARD M. MOSTOLLER M. MOSTOLLER				INCH/MM		product family			PwrBlade			code		
						engr					11 401 17 17 17			size	dwg i	no			Λ A	21	١3
						chr					scale			5	177	7 / -	- ^ ^	sh		heet	
						appd	M. MOSTOLLER		08/21/02		1:1		H			100			1 0	f 4	
she	eet	revi	sion	В	В	В	В														
index		cheet		- 1	2	3	4														

CODE

PC

НΑ N/A [N/A] HOLD-DOWN

MATING

LENGTH

[N/A]

[N/A]

[N/A]

[N/A]

[1.07] [2.34]

N/A

N/A

N/A

N/A

042

092

TYPE

SIGNAL

SIGNAL

SIGNAL

SIGNAL

POWER

POWER

1 2


Pro/E


PDM: Rev:B

STATUS: Released Printed: Aug 14, 2007

.220 [5.59]

Α

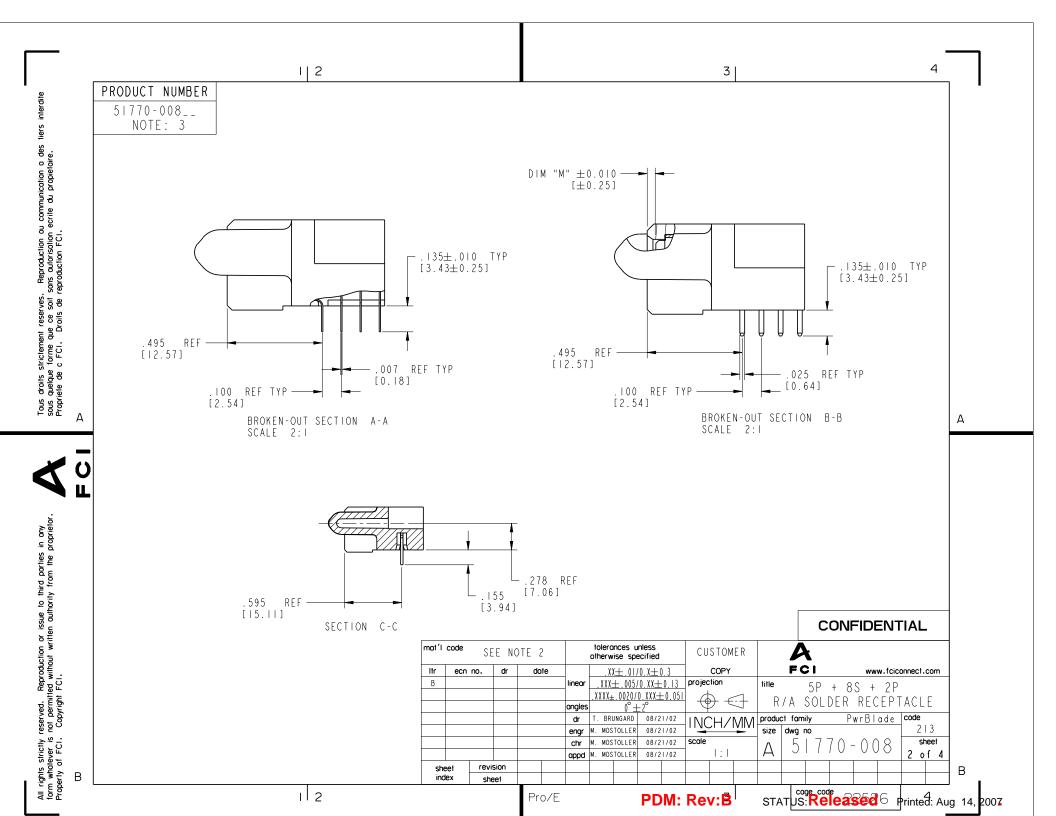

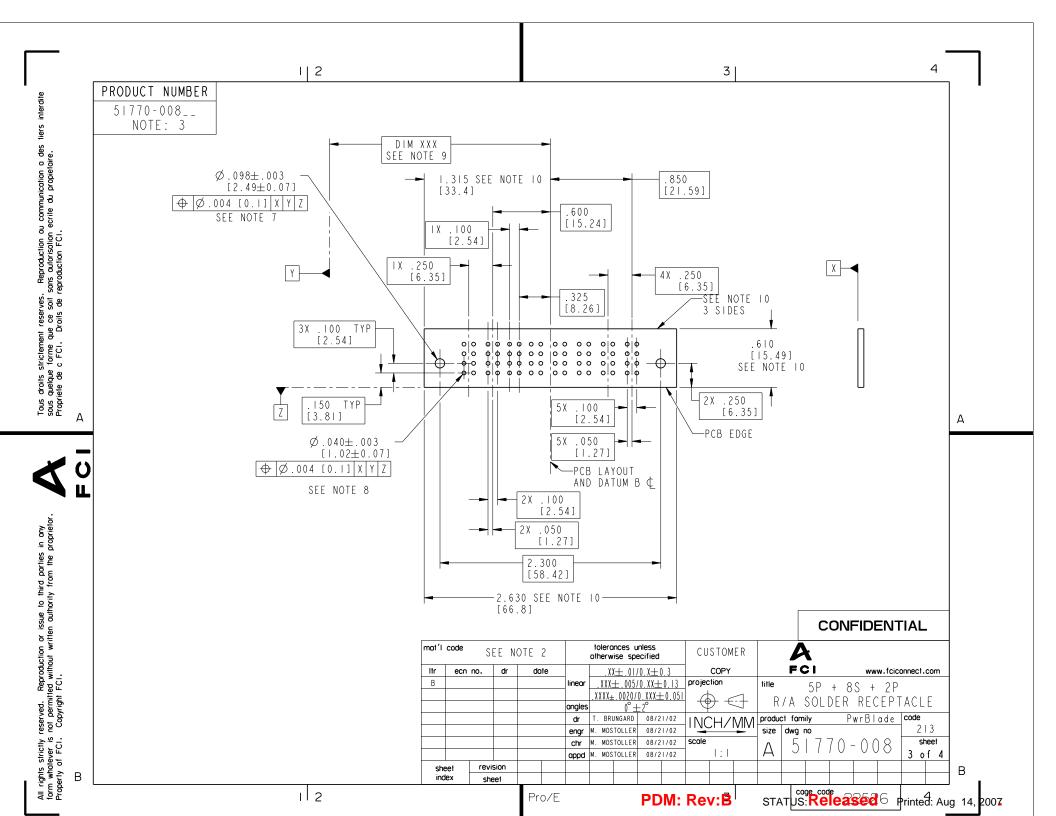

1|2 3 |

## PRODUCT NUMBER

51770-008\_\_ NOTE: 3

## NOTES:

I. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME YI4.5M, 1994 UNLESS OTHERWISE SPECIFIED.

## CONNECTOR NOTES:

HOUSING MATERIAL: UL 94 V-0 GLASS FILLED

HIGH-TEMP THERMOPLASTIC POWER CONTACT MATERIAL: COPPER ALLOY SIGNAL PIN MATERIAL: COPPER ALLOY

3. PLATING:

51770-008 Sinaal Pin:30u"/0.76um Au OVER 50u"/1.27um Ni ON THE CONTACT AREA. AND 1000"/2.54um SnPb PLATING OVER 500"/1.27um Ni ON THE TERMINATION SECTION. Power Pin:30u"/0.76um Au OVER 50u"/1.27um Ni ON THE CONTACT AREA. AND 100u"/2.54um SnPb PLATING OVER 50u"/1.27um Ni ON THE TERMINATION SECTION.

Singal Pin:30u"/0.76um Au OVER 50u"/1.27um Ni ON }THE CONTACT AREA. AND 78u"/2.00um Sn PLATING OVER 50u"/I.27um Ni ON THE TERMINATION SECTION. Power Pin: 30u"/0.76um Au OVER 50u"/1.27um Ni ON THE CONTACT AREA. AND 78u"/2.00um Sn PLATING OVER 50u"/1.27um Ni ON THE TERMINATION SECTION.

PART NUMBER 51770-008LF MEETS EUROPEAN UNION DIRECTIVE AND JOTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A CIRCUIT BOARD.

MANUFACTURER'S NAME, P/N, AND DATE CODE TO APPEAR ON THIS SURFACE.

5. PRODUCT SPECIFICATION GS-12-149. APPLICATION SPECIFICATION BUS-20-067.

## PCB NOTES:

- 6. ALL HOLE DIAMETERS ARE FINISHED HOLE SIZE.
- MOUNTING HOLES, WHERE APPLICABLE, ARE UNPLATED.
- Ø.0453±.0010 [1.151±0.025] DRILLED HOLES PLATED WITH

.0003 [0.008] MIN SnPb OVER .001 [0.03] TO .003 [0.08] Cu PLATING TO ACHIEVE Ø.040±.003 [1.02±.07] HOLE.

"DIM XXX" TO BE DETERMINED BY THE CUSTOMER.

CONNECTOR KEEP-OUT ZONE.

mat'l code tolerances unless SEE NOTE 2 CUSTOMER otherwise specified FCI ltr ecn no. dr date XX + 01/0 X + 0 3COPY www.fciconnect.com В linear .XXX±.005/0.XX±0.13 projection 5P + 8S + 2PXXXX±.0020/0.XXXX±0.05 R/A SOLDER RECEPTACLE 0°+2° angles PwrBlade code dr BRUNGARD 08/21/02 product family INCH/MM 213 MOSTOLLER 08/21/02 size dwg no engr scale sheet chr MOSTOLLER 08/21/02 770-008 +;+appd M MOSTOLLER 08/21/02 4 of 4

revision sheet index

1 2

Pro/F

PDM: Rev:B

STATUS: Released Printed: Aug 14, 2007

CONFIDENTIAL

Α

sheet