


- Convenient way to load loose receptacles on PC board. See page 32 for application details.
- Removable plastic carriers can be returned for reloading.
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.
- Uses M-M#1401 pin. See page 139 for details.

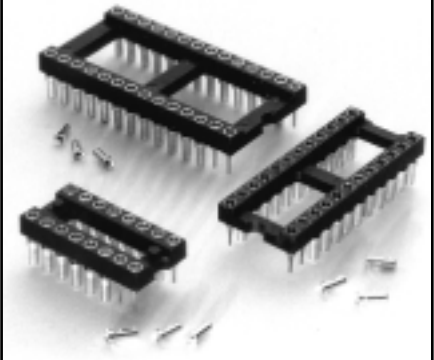

Total number of pins				Quantity per tube	<h2>Ordering Information</h2>							
	A	B	C									
10	0.5	0.2	0.3	40	<div style="text-align: center;"> <p>XX= Plating Code See Below</p> </div>							
4	0.2	0.3	0.4	102								
6	0.3	0.3	0.4	67								
8	0.4	0.3	0.4	50					614-XX-210-41-001	614-XX-304-41-001	614-XX-306-41-001	614-XX-308-41-001
10	0.5	0.3	0.4	40					614-XX-310-41-001	614-XX-314-41-001	614-XX-316-41-001	614-XX-318-41-001
14	0.7	0.3	0.4	28					614-XX-320-41-001	614-XX-322-41-001	614-XX-324-41-001	614-XX-328-41-001
16	0.8	0.3	0.4	25					614-XX-420-41-001	614-XX-422-41-001	614-XX-424-41-001	614-XX-428-41-001
18	0.9	0.3	0.4	22					614-XX-432-41-001	614-XX-624-41-001	614-XX-628-41-001	614-XX-632-41-001
20	1.0	0.3	0.4	20					614-XX-636-41-001	614-XX-640-41-001	614-XX-642-41-001	614-XX-648-41-001
22	1.1	0.3	0.4	18					614-XX-650-41-001	614-XX-652-41-001	614-XX-950-41-001	614-XX-952-41-001
24	1.2	0.3	0.4	16					614-XX-964-41-001			
28	1.4	0.3	0.4	14								
20	1.0	0.4	0.5	20								
22	1.1	0.4	0.5	18								
24	1.2	0.4	0.5	16								
28	1.4	0.4	0.5	14								
32	1.6	0.4	0.5	12								
24	1.2	0.6	0.7	16								
28	1.4	0.6	0.7	14								
32	1.6	0.6	0.7	12								
36	1.8	0.6	0.7	11								
40	2.0	0.6	0.7	10								
42	2.1	0.6	0.7	9								
48	2.4	0.6	0.7	8								
50	2.5	0.6	0.7	8								
52	2.6	0.6	0.7	7								
50	2.5	0.9	1.0	8								
52	2.6	0.9	1.0	7								
64	3.2	0.9	1.0	6								
SPECIFY PLATING CODE XX=											93	99
Sleeve (Pin)											200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)											30μ" Au	200μ" Sn/Pb