

# E-Z-HOOK WIRE SPECIFICATIONS

Description	Part Number	Length	AWG (Stranding)	Insulation Thickness	W.V.D.C.	Nominal O.D.	Temp.
<b>200 SERIES</b> PVC Insulated	<b>9504</b>	100, 500, and 1,000 feet	22AWG 65X40 Tinned Copper	.018" (.457mm)	1000 (300UL)	.070" (1.78mm)	+105°C (60°C UL)
<b>200C SERIES (Coil Cord)</b> PVC Insulated	<b>9704</b>	Coil-Lgth 7" Extends to 48"	22AWG 26X36 Tinned Copper	.035" (.89mm)	1000	.100" (2.54mm)	+105°C
<b>300 SERIES</b> Teflon Insulated	<b>9527</b>	100, 500, and 1,000 feet	24AWG 19X36 Silvered Copper	.010" (.254mm)	600	.044" (1.12mm)	+200°C
<b>400 SERIES, Red&amp;Black only</b> Silicone Insulated	<b>9508</b>	25, 50, 100, 500, and 1,000 feet	18AWG 65X36 Tinned Copper	.045" (1.14mm)	5000	.144" (3.6mm)	+150°C
<b>500 SERIES, Red&amp;Black only</b> PVC Insulation	<b>9505</b>	100, 500, and 1,000 feet	20AWG 105X40 Tinned Copper	.020" (.508mm)	1000	.080" (2.03mm)	+105°C
<b>600 SERIES</b> PVC Insulated	<b>9506</b>	100, 500, and 1,000 feet	18AWG 65X36 Tinned Copper	.045" (1.14mm)	5000	.144" (3.6mm)	+105°C
<b>600C SERIES (Coil Cord)</b> PVC Insulated	<b>9706</b>	Coil-Lgth 10" Extends to 60"	20AWG 42X36 Tinned Copper	.040" (1.02mm)	5000	.144" (3.6mm)	+105°C
<b>700 SERIES</b> PVC Insulated	<b>9501</b>	100, 500, and 1,000 feet	28AWG 19X40 Tinned Copper	.015" (.39mm)	600	.047" (1.19mm)	+105°C
<b>800 SERIES, Red&amp;Black only</b> Rubber Insulated	<b>9507</b>	100, 500, and 1,000 feet	18AWG 65X36 Tinned Copper	.045" (1.14mm)	5000	.144" (3.6mm)	+90°C
<b>900 SERIES</b> PVC Insulated	<b>9509</b>	25, 50, 100, 500, and 1,000 feet	16AWG 105X36 Tinned Copper	.040" (1.02mm)	1000	.145" (3.7mm)	+105°C
<b>1000 SERIES</b> PVC Insulated	<b>9510</b>	25, 50, 100, 500, and 1,000 feet	14AWG 105X34 Tinned Copper	.035" (.89mm)	1000	.145" (3.7mm)	+105°C


## SPECIFYING COLOR:

Most E-Z-HOOK products as specified are available in 10 standard colors as listed below. Any standard wire may be specified in these colors except laminated ribbon cable which is supplied in a solid color with polarity stripe.

**COLORS:** Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, and White.

## RIBBON CABLE

**.050" Pitch** extruded gray ribbon cable was designed for general purpose electronic interconnect applications. The cable provides reliable mass-termination to standard .100" contact IDC connectors. Consistent electricals and breakouts can be made easily with the tear feature design. Insulation material consists of gray PVC, with a red polarity strip for proper circuit alignment.

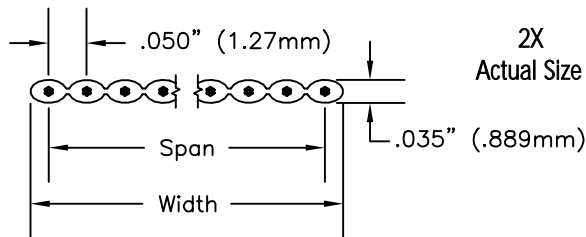


Description	Part Number	AWG (Stranding)	Insulation Thickness	Number of Conductors	Width	Span	Temp.
<b>14 Conductor</b> Ribbon Cable Laminated PVC Insulation	<b>9601-14</b>	28AWG 7X36 Tinned Copper	.010" (.254mm)	14	.700" (17.78mm)	.650" (16.51mm)	+105°C
<b>16 Conductor</b> Ribbon Cable Laminated PVC Insulation	<b>9601-16</b>	28AWG 7X36 Tinned Copper	.010" (.254mm)	16	.800" (20.32mm)	.750" (19.05mm)	+105°C
<b>20 Conductor</b> Ribbon Cable Laminated PVC Insulation	<b>9601-20</b>	28AWG 7X36 Tinned Copper	.010" (.254mm)	20	1.00" (25.40mm)	.950" (24.13mm)	+105°C
<b>40 Conductor</b> Ribbon Cable Laminated PVC Insulation	<b>9601-40</b>	28AWG 7X36 Tinned Copper	.010" (.254mm)	40	2.00" (50.80mm)	1.95" (49.53mm)	+105°C

# E-Z-HOOK WIRE PART NUMBERS

NOTE: Other wire lengths are available upon request


## 200 SERIES 22AWG PVC

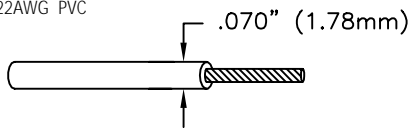

(All 10 Colors)

Part Number	Color	Length
9504-100	specify	100feet
9504-500	specify	500feet
9504-1000	specify	1000feet


## 200C SERIES (Coil Cord) 22AWG PVC

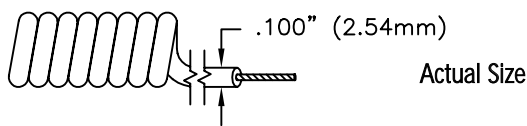

(All 10 Colors)

Part Number	Color	Length
9704	specify	Coil 7" - Extend 48"


## 300 SERIES 24AWG Teflon

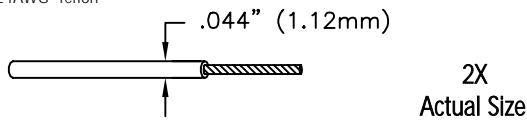

(All 10 Colors)

Part Number	Color	Length
9527-100	specify	100feet
9527-500	specify	500feet
9527-1000	specify	1000feet


## 400 SERIES 18AWG Silicone

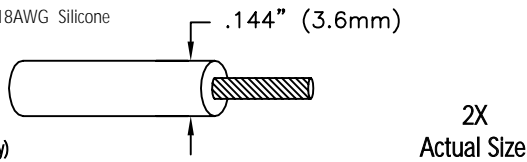

(Red & Black only)

Part Number	Color	Length
9508-25	specify	25feet
9508-50	specify	50feet
9508-100	specify	100feet
9508-500	specify	500feet
9508-1000	specify	1000feet


## 500 SERIES 20AWG PVC

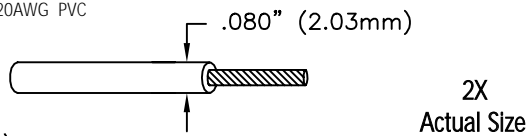

(Red & Black only)

Part Number	Color	Length
9505-100	specify	100feet
9505-500	specify	500feet
9505-1000	specify	1000feet


## 600 SERIES 18AWG PVC

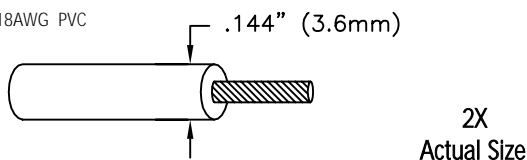

(All 10 Colors)

Part Number	Color	Length
9506-100	specify	100feet
9506-500	specify	500feet
9506-1000	specify	1000feet


## 600C SERIES (Coil Cord) 20AWG PVC

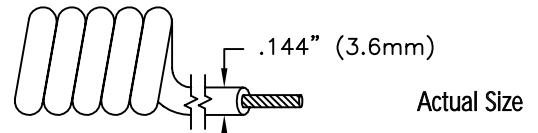

(All 10 Colors)

Part Number	Color	Length
9706	specify	Coil 10" Extend 60"


## 700 SERIES 28AWG PVC



(All 10 Colors)

Part Number	Color	Length
9501-100	specify	100feet
9501-500	specify	500feet
9501-1000	specify	1000feet


## 800 SERIES 18AWG Rubber

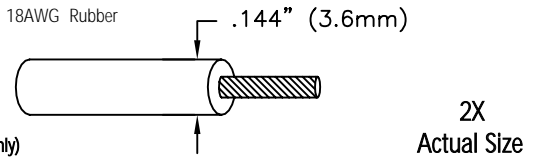

(Red & Black only)

Part Number	Color	Length
9507-100	specify	100feet
9507-500	specify	500feet
9507-1000	specify	1000feet


## 900 SERIES 16AWG PVC

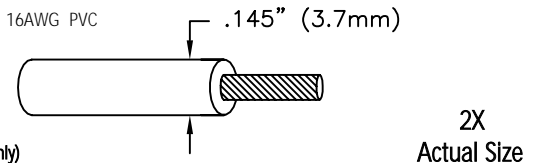

(Red & Black only)

Part Number	Color	Length
9509-25	specify	25feet
9509-50	specify	50feet
9509-100	specify	100feet
9509-500	specify	500feet
9509-1000	specify	1000feet


## 1000 SERIES 14AWG PVC

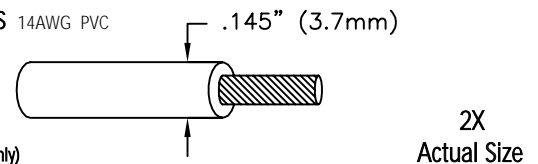

(Red & Black only)

Part Number	Color	Length
9510-25	specify	25feet
9510-50	specify	50feet
9510-100	specify	100feet
9510-500	specify	500feet
9510-1000	specify	1000feet

## RIBBON CABLE 28AWG 7 X 36 LAMINATED PVC INSULATION



Part Number	Conductors	Length
9601-14	14 Wires	100feet
9601-16	16 Wires	100feet
9601-20	20 Wires	100feet
9601-40	40 Wires	100feet