
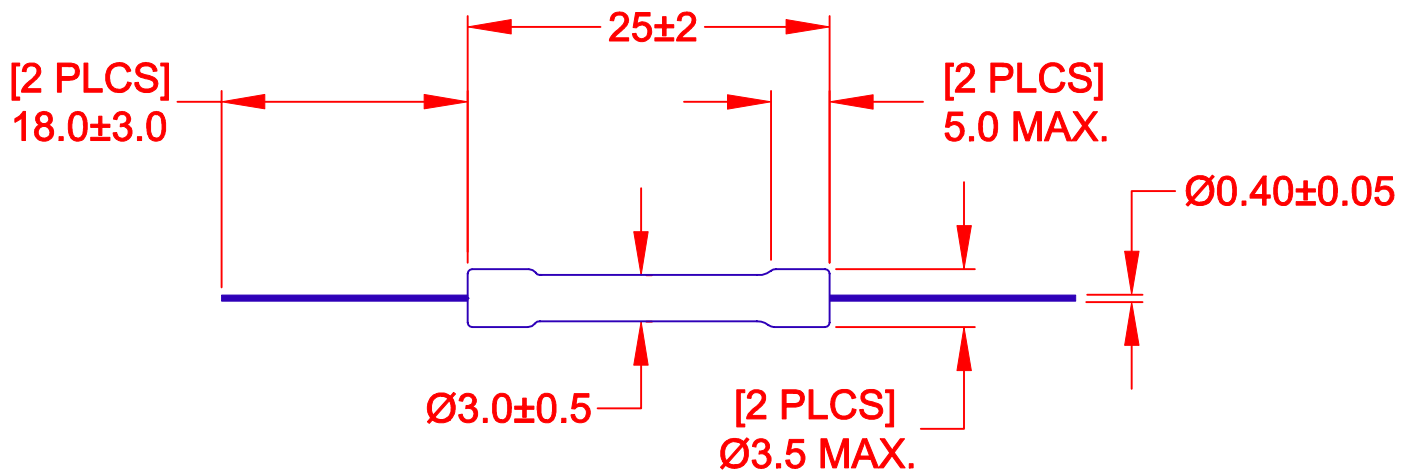


Spectral Radiance


Peak @ 436 nm

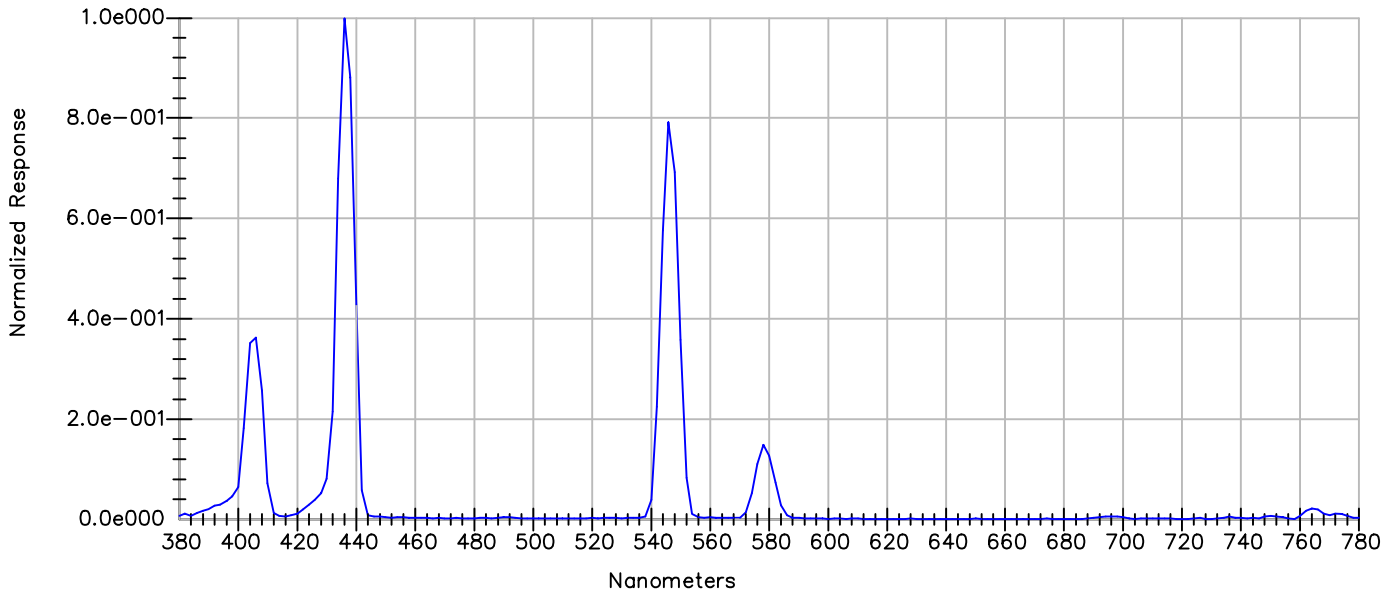

JKL LAMP PART NUMBER	OUTPUT	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mArms)	*RATED LIFE (HRS)
BF325-HG	(Hg) MERCURY SPECTRAL LINES	400 @ 25°C	165	5	7,500

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL.

NOTE: LAMP IS NOT RATED FOR ULTRAVIOLET RADIATION, ADEQUATE SHIELDING SHOULD BE USED TO PROTECT EYES FROM SHORT WAVELENGTH ULTRAVIOLET RADIATION.

METRIC  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0 2 PL +/- 0 ANGLE +/- 0		JKL COMPONENTS CORPORATION					
DRAWN BY L. WENGSTROM		APPV'D BY DATE J.K. 11/22/04		SIZE A	FSCM NO. 55335	DRAWING NO. BF325-HG			
RELEASED		11/22/04		TITLE MINIATURE COLD CATHODE FLUORESCENT LAMP					
REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE	- CAD DRAWING -		SCALE NONE	RELEASED DATE 11/22/04	REVISION DATE	REV. NO.	SHEET 1 OF 1
			MANUAL REVISIONS NOT PERMITTED						