
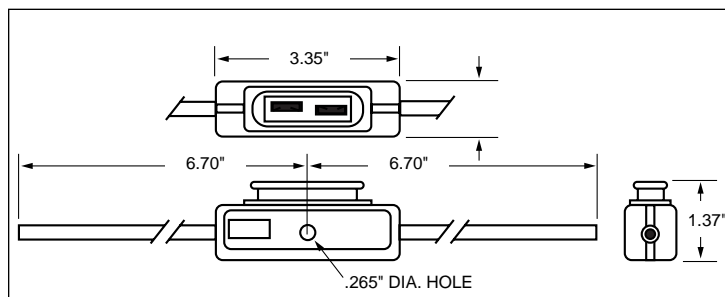


Automotive In-Line Fuseholders

For MAXI® Fuses

HHX

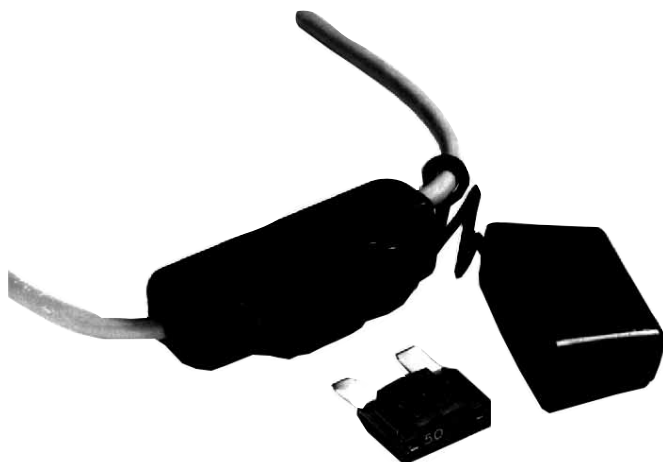

HHX

In-Line Fuseholder for MAXI® Fuses.

Voltage Rating: 32Vdc Maximum

Current Rating: See Table

Firewall mounting hole permits two or more holders to be mounted together. Cover comes with a removable strap.

MAXI® Fuse Blade Type Holder

Catalog No.	Description	Fuse Size	Electrical Connection	Maximum Continuous Current Rating
HHX	Black fuseholder w/cover	20-60A	#6 red lead wire; 5" length with blunt ends	48A*
HHX-B	Black fuseholder - Body only			
HHX-C	Black cover only			

* Or 80% of fuse rating, whichever is less

A fuse must be properly and fully inserted into the holder to provide a solid connection. Poor or improper insertion of the fuse can result in failure of the fuse and holder, thus not protecting the device for which it was intended.

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this Data Sheet are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.